


DATA SHEET

ruck.eu
VENTILATOREN

EL 315 E2 03 | 117010

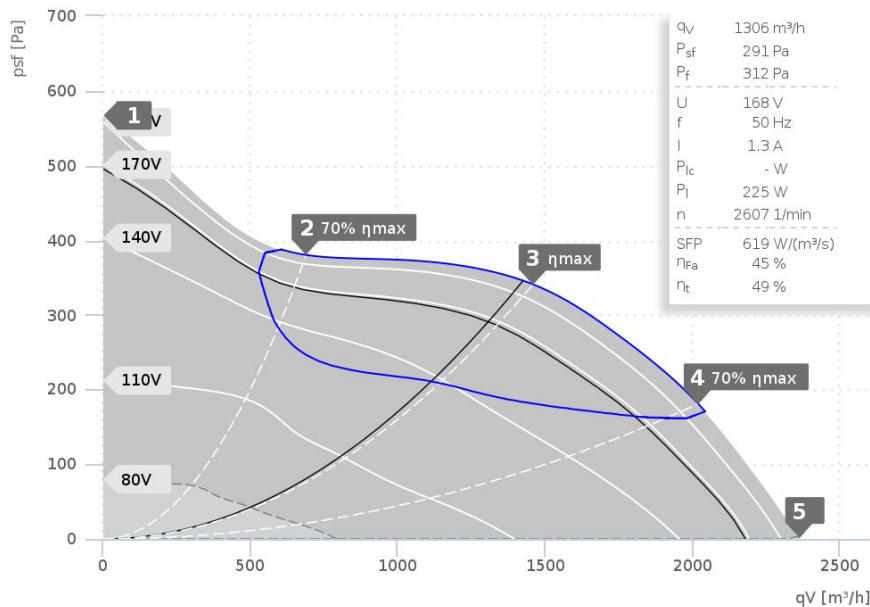

- Diagonal impeller with stator
- Galvanized metal housing
- Speed controllable
- Integrated thermostatic switch
- Including mounting bracket

Operating Point		1	2	3	4	5
Current I	A	1,1	0,9	1,2	1,2	1,1
Power consumption P _I	W	242	198	263	273	250
RPM n	1/min	2862	2888	2819	2813	2838
SPL inlet L _{WA5}	dB(A)	80	77	75	76	79
SPL outlet L _{WA6}	dB(A)	84	81	79	81	82
SPL casing break out L _{WA2}	dB(A)	64	62	58	56	58

Sound power (L _W) dB(A)		Medium Frequency Band								
		Σ	63	125	250	500	1k	2k	4k	8k
Inlet	L _{WA5}	73	-	52	62	67	68	67	63	54
Outlet	L _{WA6}	77	-	48	66	71	73	70	63	55
Casing	L _{WA2}	54	-	39	41	45	50	48	45	40

EL 315 E2 03 117010	
Voltage U _N	230 V 1~
Current I _{max}	1,6 A
Ambient Temperature t _A	55 °C
Medium temperatures t _M	55 °C
Speed Control	V
Motor Protection	TMI
Isolation Class	F
Weight	8,4 kg

